

IDU PRODUCT

01



CAMIPRO INDOOR UNIT – NEW SERIES

IDU PRODUCT

02

CAMIPRO



Elegant design with Center Hidden Display

LCD Remote

IDU SIZE: 770mm (1Ton) , 905mm (1.5Ton) , 1030mm (2 Ton)

IDU PRODUCT



Advance PCB control and features with self diagnosis



Low Noise Air flow system

Larger Dia Cross flow fan



MULTI-BLADE FAN
WIND CAPACITY
LOW NOISE



HIGH SENSITIVE
TEMPERATURE SENSING
HEAD



IDU PRODUCT


04



SUPERIOR INNER GROOVED
COPPER TUBE

DOUBLE EVAPORATORS
HIGHER EFFICIENCY

HIGH HYDROPHILIC
ALUMINUM FOIL
EFFICIENCY & DURABILITY

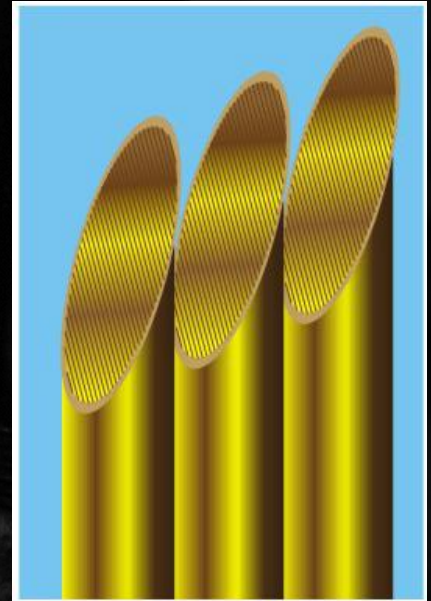

IDU PRODUCT

06



SLEEP MODE

In sleep mode, the setting temperature increases 1 or decreases 2 per hour automatically in first two hours after setting sleep mode, which helps to achieve for the user the most comfortable temperature and save energy as well.

AUTO RESTART

In case of power off, the microcomputer chip will memorize the running mode, and air con can restart with previous running mode automatically when power resumes.

BIG SIZE HIDDEN DIS

It helps the user monitor and operate the unit clearly and easily.

SELF-DIAGNOSIS

With self-diagnosis function, errors will be detected by microcomputer chips and displayed by LED on the indoor unit. Protection will then be automatically taken.



IDU PRODUCT

FEATURES

07

FEATURES	REFRIGERANT	R22 / R-410a
	AIR DIRECTION CONTROL	Yes
	SECURITY LOCK	Yes
	IDU TEMP DISPLAY	Hidden Display
	REMOTE CONTROL TYPE	LCD Remote
	REMOTE BACKLIT	Yes
	OFF TIMER	Yes
	ON TIMER	Yes
	SLEEP MODE	Yes
	REFRIGERANT LEAK DETECTOR	Yes
	LOUVER POSITION MEMORY	Yes
	DRY MODE	Yes
	AUTO FAN SPEED	Yes
	FILTER CLEAN INDICATOR	Yes
	AUTO SWING	Yes
	FOLLOW ME	Yes
	AUTO MODE	Yes
	AUTO RESTART	Yes
	TURBO MODE	Yes
	DOUBLE DRAIN (EASY INSTALLATION)	Yes
MANUAL ON/OFF BUTTON	Yes	
MY MODE (FAVOURITE MODE)	Yes	
IDU DISPLAY ON/OFF	Yes	

Material Code			224050065070	224050065080	224050065090 224050067950
Indoor Model			CAM11D6-12C	CAM11D6-18C	CAM11D6-24C
Power supply	V,HZ,Ph		230 V, 50Hz, 1Ph	230 V, 50Hz, 1Ph	230 V, 50Hz, 1Ph
Cooling Capacity	Btu/h		11000	17000	24000
Input Power (IDU Motor)	W		43 W	55 W	72 W
Powering Method			IDU powered	IDU powered	ODU powered
Indoor air flow (Hi/Mi/Lo)	m3/h		570	750	1150
Indoor noise level (Hi/Mi/Lo)	dB(A)		39/34/31	39/35/33	44/41/39
Indoor unit	Dimension(W*D*H)	mm	770X188X255	905X198X275	1030X218X315
	Packing (W*D*H)	mm	835X265X330	970X270X345	1115X300X395
	Net/Gross weight	Kg	9/11	11/13	13.5/17
Refrigerant type		g	R22	R22	R22
Design pressure		MPa	2.6/1.0	2.6/1.0	2.6/1.0
Refrigerant piping	Liquid side/ Gas side	mm(inch)	Φ6.35/Φ12.7(1/4"/1/2")	Φ6.35/Φ12.7(1/4"/1/2")	Φ6.35/Φ15.9(1/4/5/8")
Thermostat type			Remote Control	Remote Control	Remote Control
Operation temperature		°C	17-30	17-30	17-30
Connection wiring		Sq mm	1.5(Optional)	2.5(Optional)	1.0(Optional)
Application area		m2	9.5-11.25	12-14	15-25



THANK YOU FOR CHOOSING CAMIPRO

