

ZX Platform Condensing Unit

Product Catalogue



*Leading the Future
in Refrigeration Technology*



ZX Digital medium temperature series

Capacity And Power (kW) At 50Hz - TFD

R404A/ R507

Model	Ambient Temperature (°C)	Capacity Evaporating Temperature (°C)						Power Evaporating Temperature (°C)					
		-20	-15	-10	-5	0	5	-20	-15	-10	-5	0	5
ZXD040E	27	5.92	7.11	8.35	9.64	11.01	12.46	2.70	2.85	3.02	3.21	3.43	3.68
	32	5.53	6.69	7.87	9.11	10.40	11.75	2.99	3.12	3.27	3.44	3.64	3.87
	38	4.90	6.00	7.12	8.27	9.45	10.68	3.49	3.59	3.72	3.87	4.04	4.24
	43	4.23	5.28	6.33	7.40	8.48	9.59	4.02	4.10	4.21	4.34	4.50	4.68
	48	3.56	4.56	5.54	6.53	7.51		4.55	4.61	4.70	4.81	4.96	
ZXD050E	27	7.49	9.05	10.67	12.31	13.93	15.51	3.65	3.73	3.86	4.02	4.25	4.53
	32	6.56	8.12	9.76	11.43	13.10	14.74	4.11	4.20	4.32	4.50	4.72	5.00
	38	5.56	7.07	8.67	10.32	11.98	13.63	4.59	4.68	4.79	4.96	5.16	5.42
	43	4.88	6.28	7.79	9.37	10.98	12.58	5.11	5.17	5.27	5.40	5.59	5.81
	48	4.20	5.49	6.91	8.42	9.98		5.63	5.67	5.75	5.85	6.01	
ZXD060E	27	8.24	9.72	11.47	13.30	15.69	18.48	3.69	3.84	4.06	4.33	4.62	4.93
	32	7.53	9.06	10.72	12.58	14.72	17.20	4.40	4.54	4.75	5.01	5.28	5.56
	38	6.74	8.25	9.83	11.55	13.48	15.69	4.93	5.05	5.25	5.47	5.72	5.98
	43	5.90	7.48	9.07	10.74	12.57	14.63	5.59	5.69	5.85	6.06	6.28	6.51
	48	5.06	6.71	8.31	9.93	11.66		6.26	6.32	6.46	6.64	6.83	
ZXD075E	27	9.04	10.86	12.75	15.07	17.76	20.13	4.08	4.26	4.50	4.80	5.13	5.46
	32	8.33	10.01	11.82	13.86	16.20	18.92	4.88	5.03	5.27	5.54	5.86	6.17
	38	7.30	8.74	10.62	12.47	14.54	16.92	5.46	5.61	5.82	6.06	6.35	6.63
	43	6.26	7.93	9.61	11.38	13.32	15.50	6.20	6.32	6.49	6.71	6.96	7.22
ZXD076E	27	9.22	11.07	13.00	15.37	18.12	20.53	4.00	4.17	4.41	4.70	5.03	5.35
	32	8.50	10.21	12.06	14.14	16.53	19.30	4.78	4.93	5.16	5.43	5.74	6.05
	38	7.45	8.91	10.83	12.72	14.83	17.26	5.35	5.50	5.70	5.94	6.22	6.50
	43	6.39	8.09	9.80	11.61	13.59	15.81	6.07	6.19	6.36	6.57	6.82	7.07
	48	5.32	7.26	8.77	10.50	12.34		6.79	6.88	7.02	7.21	7.43	

Note : Based on return gas temperature of 18.3 °C.

■ at suction superheat of 10 K.

Power includes condenser fan.

Ambient 38 °C and 43 °C are typical design conditions for unit selection.

ZX Low temperature series

Capacity And Power (kW) At 50Hz - TFD

R404A/ R507

Model	Ambient Temperature (°C)	Capacity										Power							
		Evaporating Temperature (°C)										Evaporating Temperature (°C)							
		-40	-35	-30	-25	-20	-15	-10	-5	0	-40	-35	-30	-25	-20	-15	-10	-5	0
ZXL020E	20	1.83	2.17	2.55	2.97	3.42	3.92	4.46	5.04	5.66	1.22	1.36	1.50	1.65	1.70	1.95	2.12	2.28	2.38
	27	1.66	2.02	2.42	2.86	3.34	3.86	4.42	5.02	5.66	1.35	1.47	1.60	1.73	1.86	2.00	2.14	2.29	2.44
	32	1.45	1.82	2.24	2.70	3.19	3.73	4.31	4.92	5.58	1.50	1.60	1.71	1.83	1.95	2.08	2.21	2.34	2.48
	38	1.25	1.49	1.93	2.40	2.92	3.47	4.07	4.70	5.38	1.72	1.81	1.91	2.01	2.12	2.23	2.34	2.46	2.59
	43	1.10	1.23	1.58	2.07	2.60	3.18	3.79	4.44	5.13	1.95	2.03	2.11	2.20	2.30	2.39	2.50	2.60	2.72
	48	0.99	1.12	1.16	1.67	2.21	2.80				2.22	2.29	2.36	2.44	2.52	2.60			
ZXL025E	20	2.00	2.36	2.86	3.44	4.10	4.83	5.64	6.53	7.49	1.34	1.46	1.55	1.66	1.76	2.10	2.33	2.44	2.54
	27	1.89	2.31	2.80	3.37	4.02	4.74	5.54	6.42	7.37	1.59	1.68	1.77	1.87	1.97	2.23	2.36	2.50	2.64
	32	1.80	2.26	2.74	3.30	3.94	4.65	5.44	6.31	7.25	1.84	1.90	1.99	2.08	2.18	2.35	2.48	2.61	2.74
	38	1.63	2.03	2.50	3.05	3.68	4.38	5.15	6.01	6.94	2.12	2.16	2.22	2.31	2.41	2.61	2.72	2.84	2.96
	43	1.31	1.70	2.16	2.70	3.31	4.01	4.77	5.62	6.54	2.44	2.45	2.50	2.57	2.67	2.90	3.01	3.11	3.22
	48	1.20	1.24	1.69	2.22	2.82	3.51				2.89	2.90	2.91	2.98	3.08	3.28			
ZXL030E	20	2.23	2.87	3.62	4.45	5.35	6.30	7.29	8.30	9.31	1.55	1.73	1.90	2.07	2.10	2.39	2.53	2.60	2.70
	27	2.09	2.58	3.17	3.85	4.60	5.41	6.25	7.61	8.67	1.67	1.84	2.00	2.15	2.30	2.45	2.58	2.71	2.83
	32	2.08	2.49	3.00	3.60	4.27	5.00	5.77	7.35	8.38	1.89	2.05	2.20	2.35	2.49	2.62	2.75	2.87	2.99
	38	2.00	2.33	2.77	3.31	3.92	4.59	5.31	6.95	7.95	2.31	2.45	2.60	2.73	2.86	2.99	3.10	3.21	3.32
	43	1.73	2.03	2.44	2.95	3.54	4.19	4.89	6.55	7.52	2.77	2.91	3.05	3.18	3.30	3.41	3.52	3.62	3.72
	48	1.50	1.70	2.00	2.38	2.96	3.61				3.36	3.49	3.61	3.73	3.84	3.95			
ZXL035E	20	2.70	3.47	4.25	5.07	5.95	6.92	8.00	9.22	10.62	1.91	1.95	2.03	2.30	2.50	2.70	2.80	3.00	3.20
	27	2.55	3.31	4.07	4.85	5.69	6.61	7.63	8.78	10.09	2.26	2.33	2.43	2.56	2.72	2.90	3.08	3.27	3.47
	32	2.47	3.20	3.94	4.68	5.48	6.35	7.31	8.40	9.63	2.59	2.67	2.79	2.93	3.11	3.31	3.52	3.74	3.96
	38	2.37	3.08	3.75	4.45	5.17	5.97	6.85	7.84	8.98	3.00	3.09	3.22	3.38	3.58	3.79	4.03	4.28	4.53
	43	2.28	2.94	3.57	4.20	4.86	5.59	6.38	7.29	8.33	3.31	3.40	3.58	3.70	3.91	4.14	4.39	4.66	4.94
	48	2.17	2.76	3.33	3.89	4.48	5.12				4.00	4.15	4.30	4.45	4.50	4.60			
ZXL040E	20	3.78	4.51	5.38	6.38	7.49	8.71	10.01	11.39	12.84	2.45	2.70	2.75	3.01	3.05	3.12	3.90	4.07	4.20
	27	3.24	3.99	4.86	5.85	6.93	8.10	9.35	10.66	12.01	2.69	2.88	3.10	3.34	3.40	3.50	4.10	4.31	4.50
	32	3.02	3.77	4.63	5.58	6.63	7.75	8.93	10.16	11.43	2.99	3.17	3.39	3.64	3.90	4.17	4.43	4.67	4.88
	38	2.85	3.56	4.37	5.27	6.25	7.28	8.36	9.48	10.63	3.54	3.70	3.91	4.15	4.41	4.68	4.94	5.19	5.41
	43	2.67	3.34	4.10	4.93	5.83	6.77	7.75	8.76	9.78	4.08	4.22	4.40	4.62	4.87	5.12	5.38	5.63	5.85
	48	2.38	2.99	3.68	4.43	5.23	6.06				4.63	4.73	4.88	5.07	5.29	5.52			
ZXL050E	20	4.42	5.18	6.21	7.47	8.91	10.50	12.20	13.98	15.78	2.70	3.00	3.20	3.40	3.65	3.80	4.20	4.50	4.70
	27	3.80	4.58	5.58	6.78	8.12	9.57	11.09	12.64	14.19	2.92	3.16	3.39	3.62	3.86	4.09	4.40	4.58	4.83
	32	3.52	4.31	5.29	6.43	7.69	9.04	10.42	11.81	13.17	3.26	3.49	3.72	3.96	4.20	4.46	4.72	5.00	5.29
	38	3.25	4.03	4.98	6.06	7.22	8.43	9.65	10.84	11.97	3.88	4.10	4.33	4.57	4.83	5.11	5.41	5.73	6.07
	43	2.99	3.77	4.69	5.71	6.78	7.87	8.95	9.97	10.89	4.43	4.64	4.87	5.12	5.40	5.70	6.03	6.39	6.77
	48	2.63	3.40	4.28	5.23	6.21	7.19				4.89	5.10	5.33	5.59	5.88	6.21			
ZXL060E	20	4.84	5.80	6.92	8.19	9.59	11.11	12.72	14.41	16.16	3.00	3.20	3.50	3.76	3.90	4.15	4.41	4.67	5.20
	27	4.49	5.51	6.68	7.99	9.42	10.95	12.57	14.27	16.01	3.62	3.84	4.08	4.36	4.66	4.97	5.30	5.63	5.97
	32	4.30	5.32	6.48	7.77	9.17	10.67	12.26	13.91	15.60	4.04	4.27	4.53	4.83	5.16	5.51	5.88	6.27	6.66
	38	4.07	5.02	6.12	7.34	8.66	10.08	11.57	13.11	14.70	4.60	4.84	5.12	5.44	5.80	6.19	6.61	7.05	7.51
	43	3.81	4.67	5.67	6.79	8.00	9.30	10.67	12.09	13.54	5.17	5.41	5.69	6.03	6.42	6.84	7.30	7.78	8.29
	48	3.42	4.16	5.03	6.00	7.07	8.22				5.88	6.11	6.41	6.76	7.16	7.61			
ZXL075E	20	5.50	6.64	7.94	9.41	11.06	12.91	14.96	17.24	19.75	3.47	3.73	4.01	4.31	4.64	4.98	5.34	5.70	6.09
	27	4.99	6.14	7.42	8.84	10.40	12.13	14.03	16.12	18.41	3.93	4.20	4.51	4.84	5.21	5.59	6.01	6.44	6.89
	32	4.75	5.90	7.14	8.50	9.99	11.61	13.39	15.33	17.45	4.35	4.63	4.94	5.30	5.68	6.10	6.55	7.03	7.53
	38	4.49	5.61	6.80	8.08	9.46	10.94	12.55	14.30	16.19	4.98	5.25	5.58	5.95	6.36	6.81	7.30	7.83	8.38
	43	4.21	5.30	6.43	7.63	8.90	10.25	11.71	13.28	14.97	5.61	5.89	6.22	6.60	7.03	7.51	8.03	8.59	9.19
	48	3.81	4.85	5.91	7.01	8.16	9.38				6.38	6.65	6.98	7.38	7.82	8.32			

Note: Based on return gas temperature of 5 °C.



Power includes condenser fan.

Ambient 38 °C and 43 °C are typical design conditions for unit selection.

Physical and Electrical Data

Unit Model	Compressor	HP	Dimensions (mm)			Connection Lines		# of Fans	Compressor Current		Receiver Capacity (kg)	Unit Weight (kg)
			Width	Height	Depth	Suction	Liquid		RLA (AMPS)	LRA (AMPS)		
ZX Digital medium temperature series												
ZXD040E	ZBD29KQE-TFD	4.0	1,029	1,242	424	7/8"	1/2"	2	7.7	48.0	6.3	104.0
ZXD050E	ZBD38KQE-TFD	5.0	1,029	1,242	424	7/8"	1/2"	2	10.4	64.0	6.3	112.0
ZXD060E	ZBD45KQE-TFD	6.0	1,029	1,242	424	7/8"	1/2"	2	9.6	74.0	6.3	114.0
ZXD075E	ZBD48KQE-TFD	7.5	1,029	1,242	424	7/8"	1/2"	2	12.4	100.0	6.3	119.0
ZXD076E	ZBD48KQE-TFD	7.6	1,029	1,242	424	7/8"	1/2"	2	12.4	100.0	6.3	122.0
ZX Low temperature series												
ZXL020E	ZXI06KCE-TFD	2.0	1,029	840	424	3/4"	1/2"	1	5.6	39.2	4.4	79.0
ZXL025E	ZXI08KCE-TFD	2.5	1,029	840	424	3/4"	1/2"	1	6.2	39.2	4.4	81.0
ZXL030E	ZXI09KCE-TFD	3.0	1,029	840	424	3/4"	1/2"	1	6.0	39.2	4.4	81.0
ZXL035E	ZXI11KCE-TFD	3.5	1,029	840	424	7/8"	1/2"	1	8.3	51.5	4.4	93.0
ZXL040E	ZXI14KCE-TFD	4.0	1,029	840	424	7/8"	1/2"	1	8.6	51.5	4.4	93.0
ZXL050E	ZXI15KCE-TFD	5.0	1,029	1,242	424	7/8"	1/2"	2	10.0	51.5	6.3	106.0
ZXL060E	ZXI18KCE-TFD	6.0	1,029	1,242	424	7/8"	1/2"	2	11.1	74.0	6.3	116.0
ZXL075E	ZXI21KCE-TFD	7.5	1,029	1,242	424	7/8"	1/2"	2	14.6	101.0	6.3	121.0

Dimensional Drawings

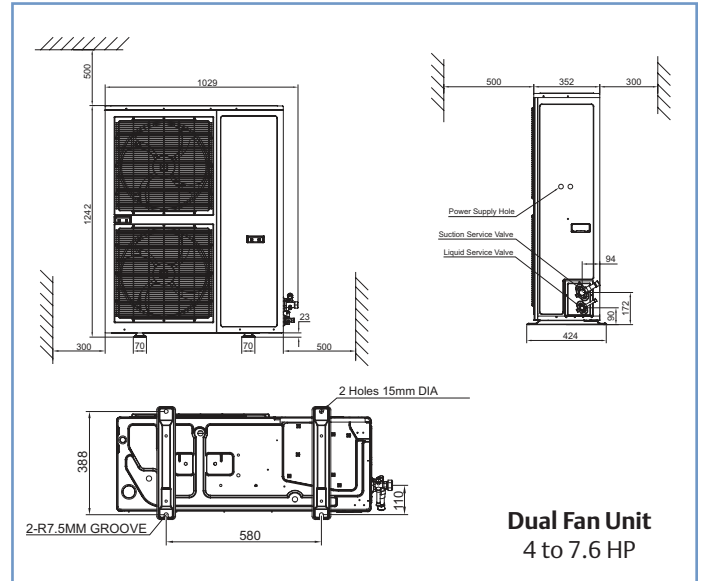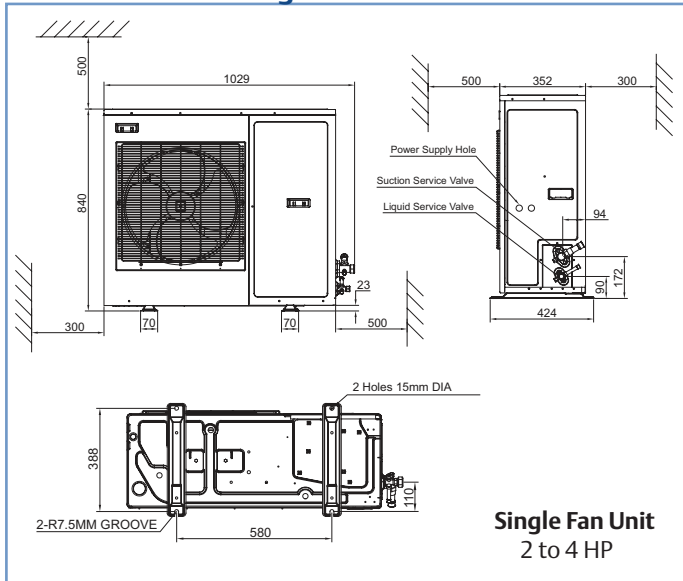

Nomenclature

Z	X	L	0	2	0	E	-	T	F	D	-	4	6	1
Unit Family	L = Low Temp D = Digital Medium Temp	2.0 to 7.6 HP	E = Ester oil O = Mineral Oil*		TFD = 380V/420V- 3ph- 50 Hz		Bill of Material							
To place an order select			>Base Model	>Electrical Code	>Bill of Material*									
* The ZX Series is only available in the featured -461 Bill of Material for Australia														

Australia

Emerson Climate Technologies Australia Pty Ltd
Unit R7, 391 Park Road,
Regents Park, NSW 2143, Australia

Telephone: (61-2) 9795 2800

Fax: (61-2) 9738 1699

EmersonClimate.com/Asia

Asia 01 A01 05 - R00 Issued 12/2011

Emerson, Copeland PerformanceAlert and Copeland Scroll are trademarks of Emerson Electric Co. or one of its affiliated companies.
©2011 Emerson Climate Technologies, Inc. All rights reserved.

EMERSON. CONSIDER IT SOLVED.™